



Gas Leak Detector

JL269 Portable Gas Leak Detector

FEATURES

- Fast response and resume
- Flexible gooseneck and adjustable display unit
- Battery low voltage alert
- LED or LCD display (optional)
- Sensor fault detection
- Automatic zero calibration
- Audible alarm signal with variable frequency


APPLICATION

Daily inspection and maintenance of the gas pipelines by the gas companies



JL269 (LCD) is a industrial type portable gas leak detector with high sensitivity and wide detecting range, it can detect about 10 types of combustible gases. It has small size, simple operation, and easy to carry, with a lengthened flexible probe, it also has good resistance to shock. It can be used to detect methane, natural gas, propane, LPG, Hydrogen and other combustible gases and can help you to find the gas leaking sources easily.

APPEARANCE

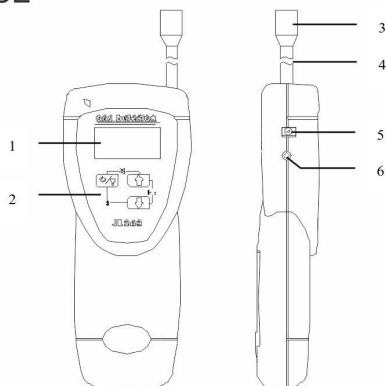

- | | |
|--------------------|--------------------|
| 1. LCD screen | 4. Gooseneck |
| 2. Button | 5. Charge terminal |
| 3. Sensor assembly | 6. Earphone input |

SPECIFICATIONS

| | | | |
|---------------------|--|-----------------------|------------------------------------|
| Measuring gas | Natural gas (CH ₄), LPG (C ₃ H ₈), H ₂ | Operating temperature | -10 ~ 55°C |
| Measuring gas range | CH ₄ : 0-30000ppm C ₃ H ₈ : 0-20000ppm H ₂ : 10000ppm | Operating humidity | < 93%RH (no condensation) |
| | | Operating power | DC3.7V 2200mAh Lithium-ion battery |
| Sensitivity | Better than 50ppm | Alarm method | Visual and audible signal |
| Response time | T ₉₀ < 5s | Sensor lifespan | 2 years |
| Measuring type | Diffuse naturally | Dimension and weight | 180*mm72mm*36mm, about 300g |
| Working time | More than 8 hours (no alarming status) continuously | | |

Welcome to Hanwei !



汉威科技集团股份有限公司
Hanwei Electronics Group Corporation

ADD: No.169 Xuesong Road,National&HighTech Zone,
Zhengzhou 450001,Henan,China P.C: 450001

www.hwsensor.com

TEL: 86-371-67169070 / 80

FAX: 86-371-67169090

E-mail: sales@hwsensor.com